




4/3" 2.0/16mm C		4/3"	1"	2/3"
FOCAL LENGTH		f=16mm		
MAX. DIAMETER (RATIO)		F=1:2.0~22		
ELEMENT		9 GROUPS 11 ELEMENTS		
PICTURE SIZE		13.8x18.4mm	9.6x12.8mm	6.6x8.8mm
ANGLE	VER. ANGLE	47.2°	33.6°	23.3°
	HOR. ANGLE	60.6°	44.0°	30.9°
	DIA. ANGLE	72.0°	53.7°	38.2°
DISTORTION (TV)		0.02%		
SHOOTING RANGE AT MINIMUM FOCUS DISTANCE	VER.	100.8mm	69.9mm	48.0mm
	HOR.	134.6mm	93.5mm	64.0mm
	DIA.	167.6mm	117.1mm	80.2mm
MINIMUM FOCUS DISTANCE		0.1m		
FLANGE BACK		17.526mm in air		
BACK FOCUS		13.0mm in air		
FILTER SCREW SIZE		M40.5x0.5		
FRONT/REAR EFFECTIVE DIA.		FRONT ϕ 31.2mm		REAR ϕ 16.5mm
MOUNT		C-MOUNT		
EXIT PUPIL		-38.0mm		
TEMPERATURE RANGE		-10~+50°C		
STORAGE TEMPERATURE RANGE		-20~+60°C		
RESOLUTION CENTER/CORNER		CENTER 160本/mm CORNER 80本/mm		
LENS COATING		WIDE BAND MULTI COATING		
WEIGHT		250 g		

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

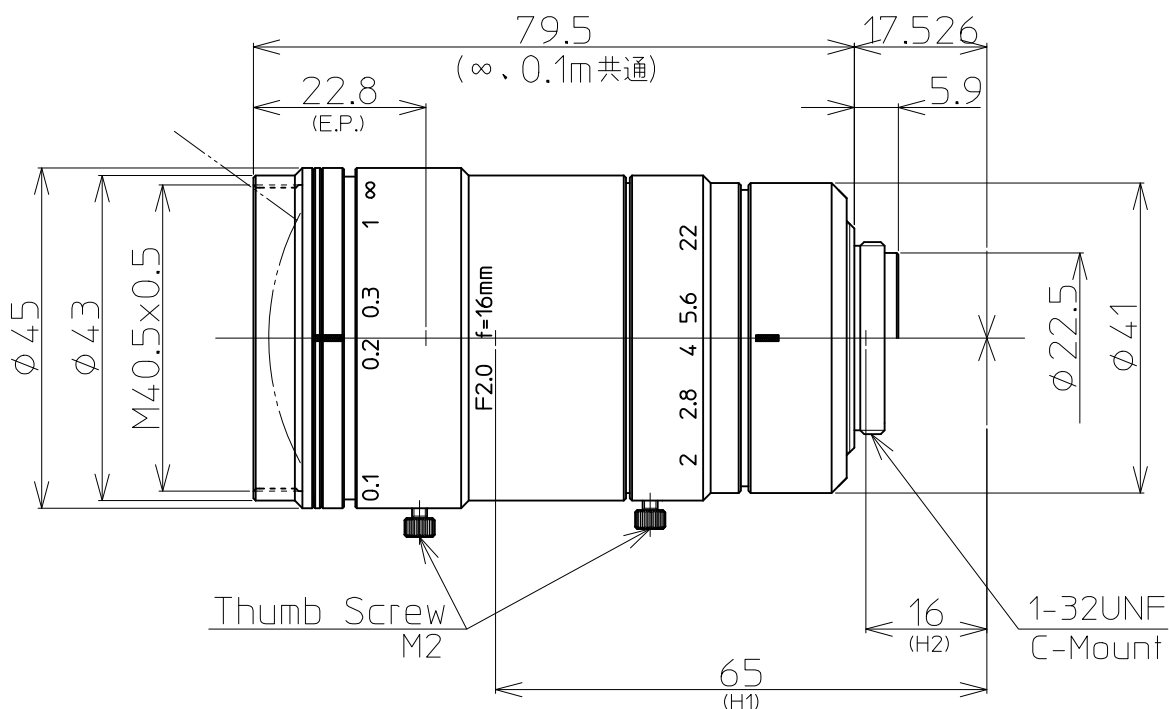

		尺 度	1/1	工場 番号	FR1047KWN
2019.7.8	絞り指標訂正(「8」削除)	機種 名	4/3" F2.0 f=16mm		
2014.12.25	更新	機種 番	LM16XC 外観図		
2013.4.15	作成年月日				